



Trio STEALTH-9 Back Cover Replacement

In this guide, you will be disassembling the back cover of your Trio so that you can replace it by following the reverse instructions.

Written By: Mei Liang



INTRODUCTION

Thank You for taking the time to read this guide! This guide will describe how to remove the back cover to your Trio STEALTH-9 and replace a new one in its place. This process should not take too long and will only require the removal of a few screws and a careful hand with the plastic shell.



TOOLS:


- [iFixit Opening Tools](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Picks set of 6](#) (1)



PARTS:

- [Trio STEALTH-9 Back Cover](#) (1)

Step 1 — Back Cover

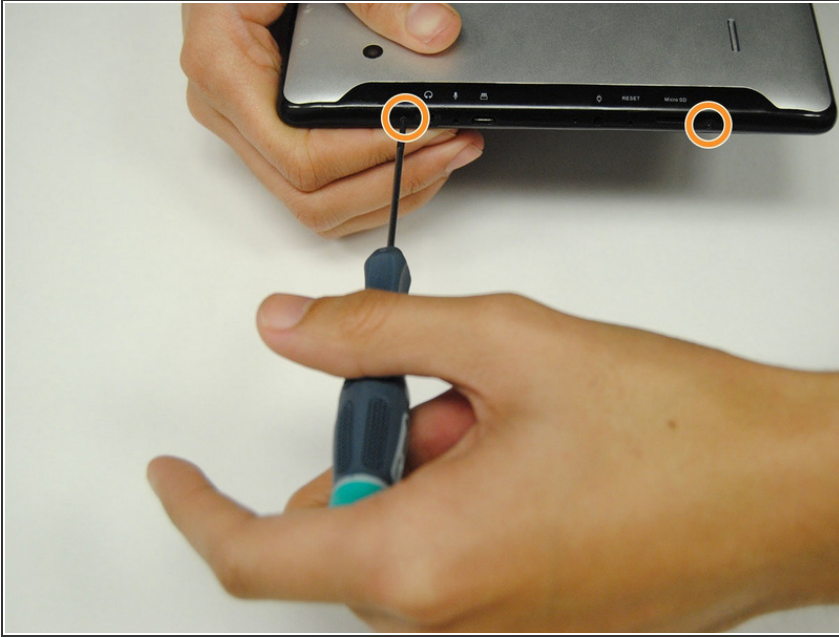

- Take your Size #00 Philips Screwdriver and locate the two small screws on the side of the tablet.
- Begin removing the two screws and store them for later.

Step 2



- Take one of the Plastic Opening Tools and wedge it in the middle of the tablet, starting on the USB Port side.
- Holding the tool in place, take one of the 6 Plastic Opening Picks and slide it across the opening you made with the Opening Tool.

Step 3



- Continue going around the tablet sides with the Plastic Pick, being sure that you are maintaining the openings you made with either your hand or the Opening Tool.
- *You will notice some popping as you go around with the pick. Don't worry, this is completely normal.*

Step 4



- Remove the back cover of the tablet to reveal the internals.
- To put a cover in, pinch each of the ends together until all four sides are closed.

To reassemble your device, follow these instructions in reverse order with your replacement cover!